


FOR MONITORING STATION

IT-GPRS

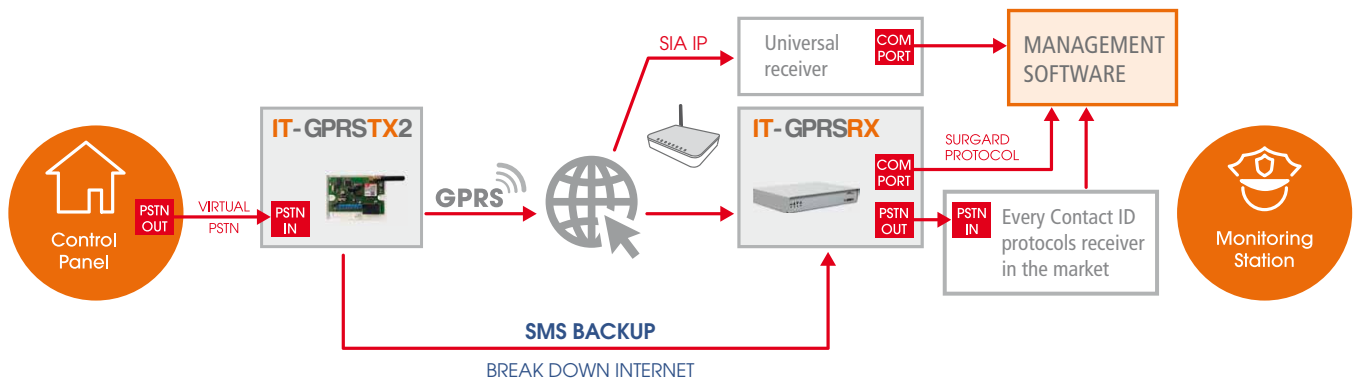


IT-GPRSTX2

UNIVERSAL GPRS TRANSMITTER FOR MONITORING STATION

- Input PSTN line to convert Contact ID and SIA fsk
- Out AMC protocol and SIA IP-DC09 for universal receiver
- PC software for setup transmission parameters
- Backup SMS in case of break down internet line (only with IT-GPRS-RX)
- 2 destination IP addresses (alternatively or backup)
- 1 output open collector programmable (for communication error)

Dimensions: W 135, H 80, D 25 mm

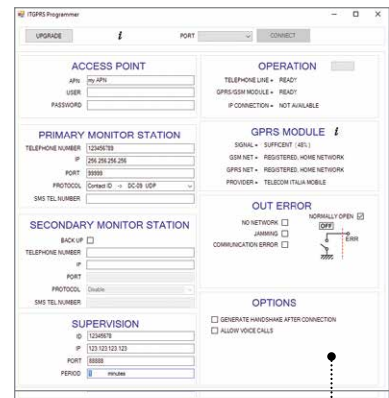

IT-GPRSRX

INTERNET RECEIVER FOR CONTACT ID PROTOCOLS

- PC software for setup for internal parameters
- 1 COM port with surgard protocol (to use with every monitoring station software receiver)
- PSTN line out emulation (to use with every data receiver)
- Backup SMS in case of break down internet line
- Synoptic LED panel for work info
- Internal backup battery (2,2 Ah)

Dimensions: W 250, H 45, D 200 mm

